


**TECHNICAL SPECIFICATION
FOR
Single Mode Optical Fiber Cable
for Aerial Application
(SM 4, 12, Fibers)**

AMITY SATELLITE SYSTEMS, INC.

Single Mode Optical Fiber Cables

1. Cable Cross-section

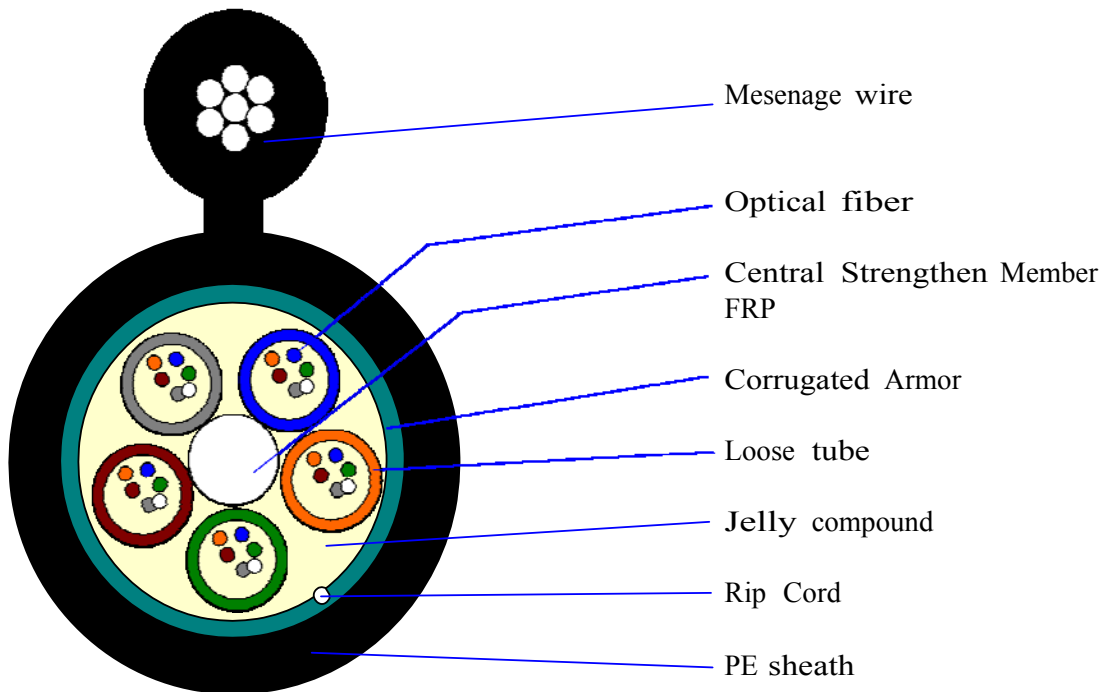

2. Cable Specification

2.1 Sheath marking

AMCOM	GYFTC8S	XXB1	2012XXXX	XXXXM
-------	---------	------	----------	-------

- AMCOM** : Manufacturer's name
- GYFTC8S** : Cable type
- XXB1** : Cable size
- 2012XXXX** : Manufacturing date
- XXXXM** : Mark of meters

**The marking is printed every 1 meter*

2.2 The color of marking is white, but if the re-printing is necessary, the **yellow color** marking shall be printed newly on a different position.

2.3 Each cable ends are sealed with heat shrinkable end caps to prevent water ingress.

2.4 Fiber color code

No.	1	2	3	4	5	6
Color	Blue	Orange	Green	Brown	Gray	White
No.	7	8	9	10	11	12
Color	Red	Black	Yellow	Violet	Pink	Aqua

Single Mode Optical Fiber Cables

2.5 Loose tube (LT) & filler rod (FR) color code

Fiber number	Element no.											
	1	2	3	4	5	6	7	8	9	10	11	12
4,12	LT	LT	LT	LT	LT	LT	LT	LT	LT	LT	LT	LT

2.6 Cable structure and parameter

Fiber number	fiber number per tube	Total unit number (LT + FR)	Sheath thickness (nominal*)	Outer diameter (nominal**)	Weight (approx.)	CSM diameter
			mm	mm	kg/km	mm
4	6	1 LT+4FR	2.0	10.8	227	1.5
12	6	2 LT+3FR	2.0	10.8	227	1.5

Fiber number	Loose tube diameter	Loose tube thickness	Corrugated Armor (Width*Height)	Messenger wire diameter without PE	Messenger wire diameter with PE
	mm	mm	mm	mm	mm
4	2.0	0.35	23*0.25	3.6(1.2*7)	8.6
12	2.0	0.35	23*0.25	3.6(1.2*7)	8.6

* The nominal sheath thickness may have a tolerance with $\pm 0.2\text{mm}$.

** The nominal diameter may have a tolerance with $\pm 0.4\text{mm}$.

3. Performance of Cabled Optical Fiber

The performance of cabled single mode optical fiber (ITU-T Rec. G.652B)

Item	Specification
Type of fiber	Single mode
Fiber material	Doped silica
Attenuation coefficient @ 1310 nm @ 1550 nm	$\leq 0.36 \text{ dB/km} \leq 0.22 \text{ dB/km}$
Point discontinuity @ 1310 & 1550 nm	$\leq 0.05 \text{ dB}$
Cable cut-off wavelength	$\leq 1260 \text{ nm}$
Zero-dispersion wavelength	1300 ~ 1324 nm
Zero-dispersion slope	$\leq 0.093 \text{ ps}/(\text{nm}^2.\text{km})$
Chromatic dispersion @ 1288 ~ 1339 nm @ 1271 ~ 1360 nm @ 1550 nm	$\leq 3.5 \text{ ps}/(\text{nm}.\text{km}) \leq 5.3 \text{ ps}/(\text{nm}.\text{km}) \leq 18 \text{ ps}/(\text{nm}.\text{km})$
PMD _Q (Quadrature average*)	$\leq 0.2 \text{ ps}/\text{km}^{1/2}$
Mode field diameter @ 1310 nm	$9.2 \pm 0.4 \mu\text{m}$

Single Mode Optical Fiber Cables

Core/Clad concentricity error	≤ 0.5 μm
Cladding diameter	125.0 ± 0.7 μm
Cladding non-circularity	≤ 1.0%
Primary coating diameter	245 ± 10 μm
Proof test level	100 kpsi (=0.69 Gpa), 1%
Temperature dependence 0°C~ +70°C @ 1310 & 1550nm	≤ 0.1 dB/km

* PMD_Q is a link of 20 cable sections (M) and a probability level of 0.01% (Q).

4. Performance of Optical Cable

4.1 Cable bending radius: 10 x cable diameter (static)
20 x cable diameter (dynamic)

4.2 Application temperature range

Operating temperature range	: -40°C to +60°C
Storage / Transport temperature range	: -50°C to +60°C
Installation temperature range	: -20°C to +50°C

4.3 Main mechanical & environmental performance test

S/N	Item	Test Method	Acceptance Condition
1	Tensile Strength IEC 794-1-E1	-Load: 2,500 N -Length of cable under load: 50 m	-Loss change ≤ 0.1 dB @ 1550 nm -No fiber break and no sheath damage.
2	Crush Test IEC 794-1-E3	-Load: 1,000 N/100 mm -Load time: ≥ 1min.	-Loss change ≤ 0.1 dB @ 1550 nm -No fiber break and no sheath damage.
3	Impact Resistance IEC 794-1-E4	-Points of impact: 5 -Times of per point: 5 - Impact energy: 4.5 N.m -Radius of hammer head: 12.5mm - Impact rate: 2 sec/cycle	-Loss change ≤ 0.1 dB @ 1550 nm -No fiber break and no sheath damage.
4	Repeated Bending IEC 794-1-E6	-Bending radius.: 20 x cable diameter -Load: 150 N -Flexing rate: 3 sec/cycle -No. of cycle: 30	-Loss change ≤ 0.1 dB @ 1550 nm -No fiber break and no sheath damage.

Single Mode Optical Fiber Cables

5	Torsion IEC 794-1-E7	-Length: 1 m -Load: 150 N -Twist rate: 1 min/cycle -Twist angle: $\pm 180^\circ$ -No. of cycle: 10	-Loss change ≤ 0.1 dB @1550 nm -No fiber break and no sheath damage.
6	Water Penetration Test IEC 794-1-F5B	-Height of water: 1 m -Sample length: 3 m -Test time: 24 hours	-No water shall have leaked from the opposite end of cable.
7	Temperature Cycling Test IEC 794-1-F1	-Temperature step: $+20^\circ\text{C} \rightarrow -40^\circ\text{C} \rightarrow +70^\circ\text{C} \rightarrow +20^\circ\text{C}$ -Time per each step: 12 hrs -Number of cycle: 2	-Loss change ≤ 0.05 dB/km@1550 nm -No fiber break and no sheath damage.
8	Compound Flow IEC 794-1-E14	-Sample length: 30 cm -Temp: $70^\circ\text{C} \pm 2^\circ\text{C}$ -Time: 24 hours	-No compound flow
9	Sheath High Voltage Test	-On line test -9t KV (t-sheath thickness)	-No sheath breakdown

5. Packing and Marking

5.1 Packing

5.1.1 Each single length of cable shall be wound on an iron stand-wooden or pure wooden drum.

5.1.2 Standard drum length is 4000m $\pm 1\%$ or 2000m $\pm 1\%$ or according to customer requirement.

5.1.3 Covered by plastic buffer sheet.

5.1.4 Sealed by strong wooden battens.

5.1.5 At least 1m of inner end of cable should be reserved for testing.

5.2 Drum marking

- Manufacturing year and month;
- Roll-direction arrow;
- Cable outer end position indicating arrow;
- The word "**OPTICAL FIBER CABLE**";
- Cable type and size;
- Drum number;

Single Mode Optical Fiber Cables

- Drum length;
- Gross / net weight;
- Origin, The word "**MADE IN CHINA**";
- Caution plate indicating the correct method for loading, unloading and convey the cable;
- *Other customer information such as contract no., project no., and delivery destination. (if needed)*

5.3 Cable quality certificate documents

- Quality certificate;
- Test report.

SPEC. END
