



WPC-12S/12/16 PASSIVE COMBINER

FEATURES


- Low Insertion Loss
- High Isolation
- -20dB Test Point
- 19" EIA Rack Mountable
- Easy Installation

SPECIFICATION

Output	: 1 Output
Input	: WPC-12 12 Inputs WPC-12S 12 Inputs WPC-16 16 Inputs
Frequency Range	: 5~600 MHz for WPC-12/16 5~1 GHz for WPC-12S
Insertion Loss	: WPC-12 ≤ 19 dB WPC-12S ≤ 25 dB WPC-16 ≤ 25 dB
Isolation	: 30 dB for WPC-12/16 ≥ 24 dB for WPC-12S
Test Point	: -20 dB
Dimension	: 19"(L) x 2-1/4"(W) x 1-3/4"(H)
Weight	: 4 Lbs
Packing	: 1 Set/Inner Box 12 Sets/Cartron/24.5 Kgs/2.3 cuft



FRONT PANEL

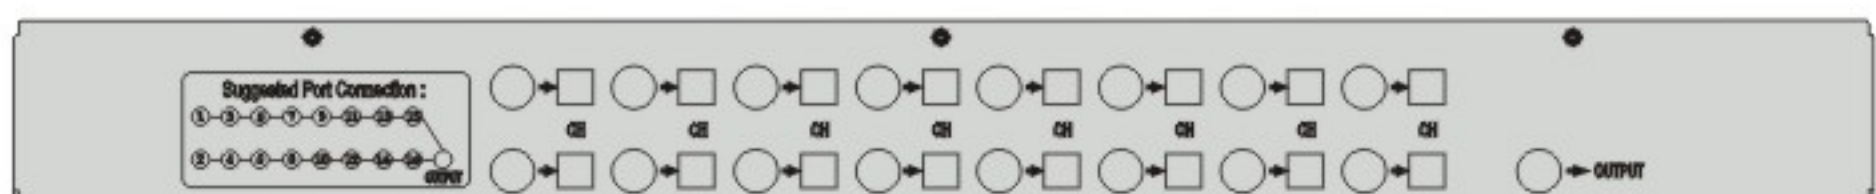

REAR PANEL